

Adaptors and chargers for use with gauges



Description

For use with Mecmesin VFG/AFG/BFG/CFG digital gauges and the VFTI/AFTI universal displays. Versions for specific geographical locations are available. Versions for VFG and VFTI Vector Instruments use the charging cable supplied with the instrument itself.

For VFG and VFTI Touchscreen instruments



304-059, UK, USB-C 3-pin square, model: PDS27B-1701
 Input: 100-240Vac 50/60Hz 0.6A Max
 Output: 5V/3A, 9V/3A, 12V/2.25A, 3V-9V/3A
 9V-11V/2.45A



304-067, Europe, 2-pin round.
 Model CA-46AT, made in China
 input: 100-240V~50/60Hz 0.5A
 Output-C: 5.0V=3.0A; 9.0V=2.22A; 12.0V=1.5A
 Output-A: 3.6-6.5V=3.0A; 6.5-9.0V=2.0A; 9.0-12.0V=1.5A
 Output: A+C=20W Max



304-072, USA, 2-pin flat
 Model CA-46AT, made in China
 input: 100-240V~50/60Hz 0.5A
 Output-C: 5.0V=3.0A; 9.0V=2.22A; 12.0V=1.5A
 Output-A: 3.6-6.5V=3.0A; 6.5-9.0V=2.0A; 9.0-12.0V=1.5A
 Output: A+C=20W Max



304-060, Australia, 2-pin flat slant
 Model A2247
 Input: 100-240V~50-60Hz 0.5A
 (USB-PD) Output: 5VDC/3A or 9VDC/2.22A

Specifications

Part No.	Region	Pins	Pin Type	Weight
304-059	UK	3-pin	Square	101 g
304-067	Europe	2-pin	Round	52 g
304-072	USA	2-pin	Flat	49 g
304-060	Australia	2-pin	Flat slant	68 g

NOTE: Power specifications correct for items supplied at time of publication, based on data available from the supplier, manufacturer or third-party source.

For AFG/AFTI/BFG/CFG instruments



304-005, UK, 230 V, 3-pin Square



304-004, Europe, 230 V, 2-pin Round






304-006, USA, 110 V / 115 V, 2-pin Flat

Specifications

Part No.	Region	Power	Pins	Pin Type	Weight
304-004	Europe	230 V	2-pin	Round	110 g
304-005	UK	230 V	3-pin	Square	125 g
304-006	USA	110 V	2-pin	Flat	110 g

Dimensions, mm, 304-004/005/006

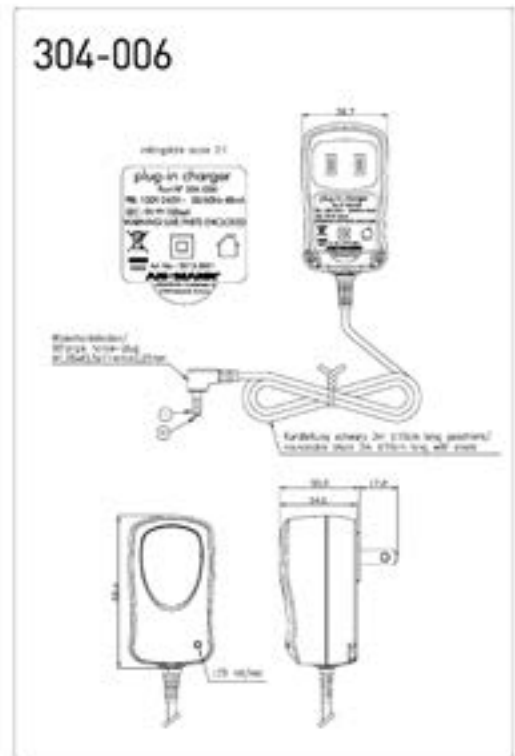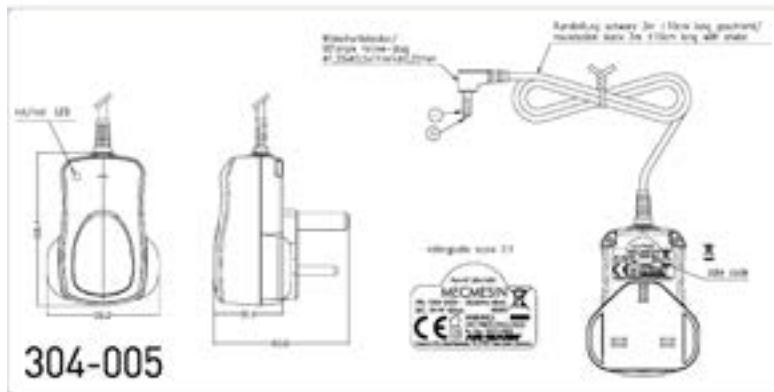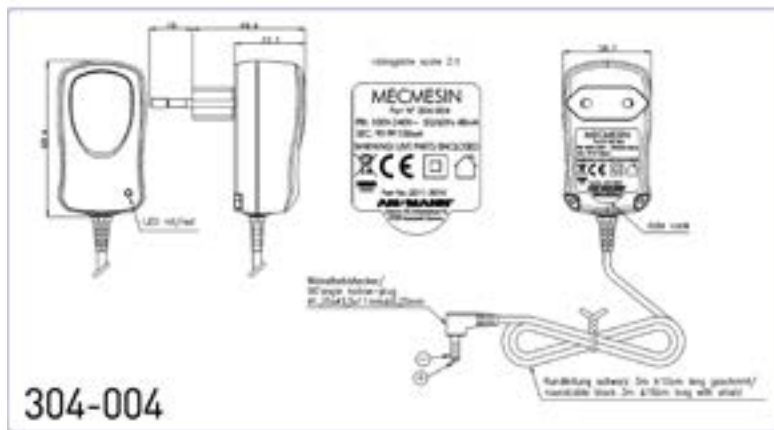

Dimensions, mm (inch), 304-059/060/067/072

Part No.	Region	Length (body)	Length (inc. pins)	Width	Height
304-059	UK	60 mm (2.36")	85 mm (3.35")	48 mm (1.89")	65 mm (2.56")
304-067	Europe	65 mm (2.56")	84 mm (3.31")	42 mm (1.65")	27 mm (1.06")
304-072	USA	45 mm (1.77")	62 mm (2.44")	42 mm (1.65")	26 mm (1.02")
304-060	Australia	50 mm (1.97")	67 mm (2.63")	42 mm (1.65")	30 mm (1.18")

Mecmesin reserves the right to alter equipment specifications without prior notice. E&OE.