

# Clevis Grips



## Description

Clevis grips feature a removable pin which can be inserted into the U-shaped clevis. The specimen is usually pre-conditioned with a hole or eyelet through which the clevis pin is passed to secure it in place. Models 432-400 and 432-443 have a clevis pin with quick-release detents to speed up inserting and removing the pin.


## Applications

Used for testing heavy duty tension springs or for securing odd-shaped parts which have an eyelet.

## Specifications

Part No.	Load Capacity	Thread 1	Width (B)	Pin Diameter (ØD)	Length (C)	Weight
432-403	500 N / 50 kgf / 110 lbf	10-32 UNF	5 mm (0.20")	5 mm (0.20")	26 mm (1.02")	13 g (0.03 lb)
432-216	500 N / 50 kgf / 110 lbf	M6	6 mm (0.20")	6 mm (0.24")	31 mm (1.22")	13 g (0.03 lb)
432-400	2.5 kN / 250 kgf / 550 lbf	5-16 UNC	8 mm (0.31")	8 mm (0.31")	42 mm (1.65")	90 g (0.20 lb)
432-443	5 kN / 500 kgf / 1100 lbf	M12	12 mm (0.47")	12 mm (0.47")	62 mm (2.44")	250 g (0.55 lb)

# Dimensions mm (inch)

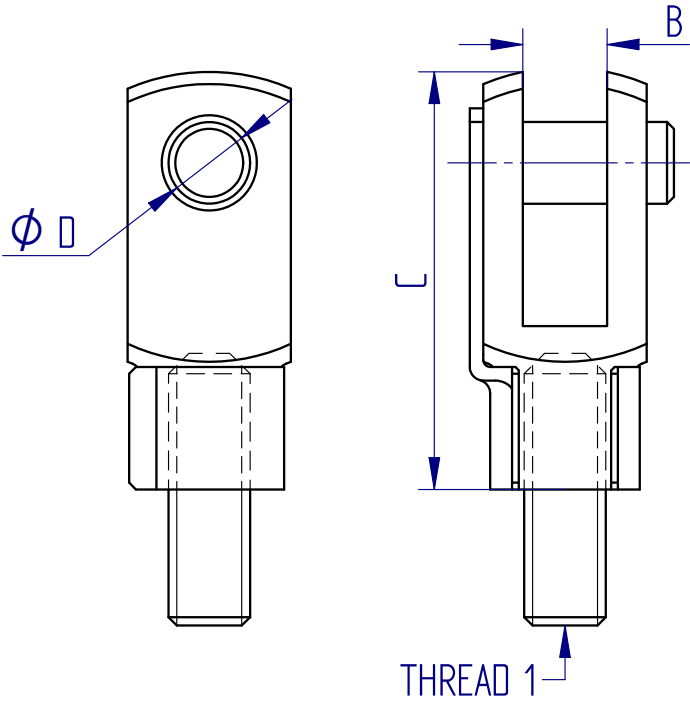

Mecmesin reserves the right to alter equipment specifications without prior notice. E&OE.